
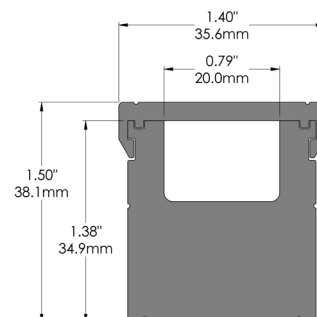


Wall Washer — *High Output*

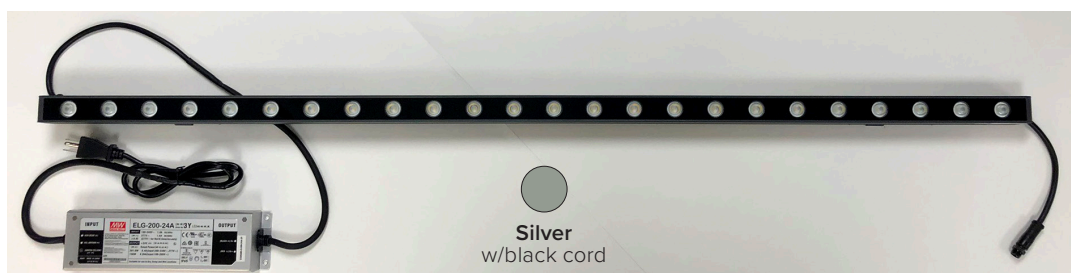

DESCRIPTION:

Wall Washer — *High Intensity* units, are used to light merchandising on varied wall treatments and work well in open air environments, lighting up to 7' in distance. Two sliding brackets are provided for multiple mounting options.

- Silver housing is anodized aluminum
- Aluminum body with 4 mm tempered glass optical lenses
- Versatile mounting options for a variety of surfaces
- Built-in strain relief protects cord from retail environment
- Operates on 24V low voltage
- Powered by SELV (Safety Extra Low Voltage) driver, which is UL listed
- 5 Year Warranty

SPECIFICATIONS:

LED Type	Standard
Recommended Target Distance	Up to ~7' (84")
LED Chip	SMD 3030
CRI	Ra > 80
Lumen	34"/1500, 46"/2000
Diodes/Foot	7
Efficiency	80-85lm/W
Connector	2-pin – twist lock – 16 AWG
CCT	Pure 5000K
IP Rating	IP20
Beam Angle	30°
Lifetime	> 50,000 Hours
Voltage	24V
Dimensions	1.4" W x 1.5" H
Dimmable	Yes



Part Number	Nominal Length	Actual Length	Wattage	Lumen Output
WWB-34-21G-12H-PV	34"	876 mm	18	1500
WWB-46-27G-18H-PV	46"	1,168 mm	24	2000